

HM108

Metallizable Low SIT Base Film (85°C)



TRANSPARENT BOPP FILM

DESCRIPTION :


Gulf Pack HM108 is a heat sealable film, one side treated with metal receptive layer and the other side specially designed with low seal initiation temperature (SIT) property of 85°C.

PRODUCT FEATURES :

Metal receptive layer for good aluminum metal adhesion
 One side with low sealing threshold (85°C)
 Wide sealing range
 Excellent lay flat characteristics
 Good resistance to oils, fats & chemicals
 Good barrier to moisture, odor & gases

APPLICATIONS :

Prime substrates for metallization of film.
 Printing and lamination

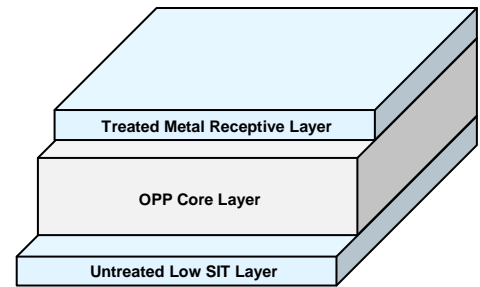

PROPERTIES		UNIT	TYPICAL VALUES				TEST METHOD.
PHYSICAL	Thickness	Microns	18	20	25	30	ASTM D 374
		Gauge	72	80	100	120	
	Grammage	g/m ²	16.38	18.20	22.75	27.30	*GPIM
		lbs/ream	10.1	11.2	14.0	16.8	
	Yield	m ² /kg	61.05	54.95	43.96	36.63	
		in ² /lb	43,000	38,700	31,000	25,800	
Coefficient of Friction (Film/Film)			0.45				ASTM D 1894
Surface Tension (Treated Side)		dynes/cm	44				ASTM D 2578
OPTICAL	Haze	%	3.0				ASTM D 1003
	Gloss (45°)		85				ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	15				ASTM D 882
		*TD	27				
		MD	21,330				
		TD	38,394				
	Elongation at Break	MD	170				ASTM D 882
		TD	50				
THERMAL	Thermal Shrinkage	MD	< 4.0				GPIM (120°C (248°F), 5 min, air)
		TD	< 2.0				
	Heat Seal Range	°C (°F)	85 – 140 (185 – 284)				GPIM
	Heat Seal Strength (Film/Film)	g/15mm	275				GPIM (130°C, 1bar, 1sec)
		lb/0.59in	0.60				GPIM (266°F, 14.5psi, 1 sec)

* GPIM – Gulf Pack Internal Method

*MD – Machine Direction

*TD – Transverse Direction

Gulf Pack HM108 films comply with EU Regulation 10/2011/EC and USA FDA Code of Federal Regulations CFR21 section 177.1520 (c) 1.1 and are suitable for use in packaging, carrying and transporting foodstuffs.

The information contained in this technical leaflet illustrates typical values only and are to the best of our knowledge. Since the conditions under which our films may be used are beyond our control, such values are declared without warranty or guarantee.

Bi-axially oriented polypropylene films age with time and will exhibit deterioration of some properties if not stored in a suitable environment at a temperature 30°C or below. We strongly advise our customers to use recommended storage conditions and consume products before 6 months from date of production in our plant.

Gulf Pack HM108 standard surface treatment location is on the outer side (O); other treatment preference can be arranged upon agreement with the sales representative before order processing.

Detailed advice regarding other specific applications of **Gulf Pack HM108** and other films in the Gulf Pack range is available upon request.