

HF126

BOPP Heat Sealable High COF Film



TRANSPARENT BOPP FILM

DESCRIPTION :


Gulf Pack HF126 is a transparent film with both sides heat sealable high coefficient of friction (COF), specially designed for pasta packaging application.

PRODUCT FEATURES:

- Excellent machinability
- High coefficient of friction (COF)
- Excellent lay flat characteristics
- Good resistance to oils, fats & chemicals
- Good barrier to moisture, odor & gases

APPLICATIONS:

- Pasta packaging
- Rotogravure and flexographic printing
- Lamination
- HFFS and VFFS packaging

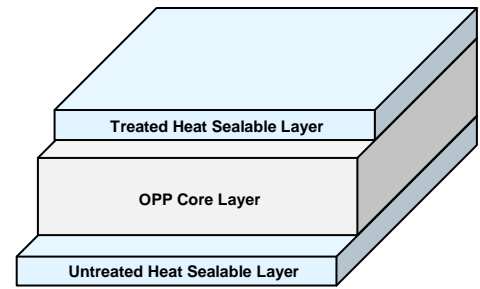

PROPERTIES		UNIT	TYPICAL VALUES				TEST METHOD.
PHYSICAL	Thickness	Microns	18	20	25	30	ASTM D 374
		Gauge	72	80	100	120	
	Grammage	g/m ²	16.38	18.20	22.75	27.30	*GPIM
		lbs/ream	10.1	11.2	14.0	16.8	
	Yield	m ² /kg	61.05	54.95	43.96	36.63	
		in ² /lb	43,000	38,700	31,000	25,800	
Coefficient of Friction (Film/Film)			0.55				ASTM D 1894
Surface Tension (Treated Side)		dynes/cm	38				ASTM D 2578
OPTICAL	Haze	%	2.5				ASTM D 1003
	Gloss (45°)		85				ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	15				ASTM D 882
		*TD	27				
		MD	21,330				
		TD	38,394				
	Elongation at Break	MD	170				ASTM D 882
		TD	50				
THERMAL	Thermal Shrinkage	MD	< 4.0				GPIM (120°C (248°F), 5 min, air)
		TD	< 2.0				
	Heat Seal Range	°C (°F)	105 – 140 (221 – 284)				GPIM
	Heat Seal Strength (Film/Film)	g/15mm	275				GPIM (130°C, 1bar, 1sec)
lb/0.59in		0.60				GPIM (266°F, 14.5psi, 1 sec)	

* GPIM – Gulf Pack Internal Method *MD – Machine Direction *TD – Transverse Direction

Gulf Pack HF126 films comply with EU Regulation 10/2011/EC and USA FDA Code of Federal Regulations CFR21 section 177.1520 (c) 1.1 and are suitable for use in packaging, carrying and transporting foodstuffs.

The information contained in this technical leaflet illustrates typical values only and are to the best of our knowledge. Since the conditions under which our films may be used are beyond our control, such values are declared without warranty or guarantee.

Bi-axially oriented polypropylene films age with time and will exhibit deterioration of some properties if not stored in a suitable environment at a temperature 30°C or below. We strongly advise our customers to use recommended storage conditions and consume products before 6 months from date of production in our plant.

Gulf Pack HF126 standard surface treatment location is on the outer side (O); other treatment preference can be arranged upon agreement with the sales representative before order processing.

Detailed advice regarding other specific applications of **Gulf Pack HF126** and other films in the Gulf Pack range is available upon request.